



- Tentative Specification
- ✓ Preliminary Specification
- Specification Approval

## Specification For SID 6.00” BW EPD

**Model Name: JS0600N06-MNG-A0**

**Version:V0.1**

SID	PREPARED BY	CHECKED BY	APPROVED BY
SIGNATURE	JY. Guo		
DATE	2022.05.03		

CUSTOMER APPROVAL	SIGNATURE	DATE
	Notes:	

**Notes :**

- 1、 Please contact SID before assigning your product based on this module specification.
- 2、 To improve the quality of product, and this product specification is subject to change without any notice.



# CONTENTS

<b>1 General Description</b>	<b>4</b>
<b>2 Features</b>	<b>4</b>
<b>3 Application</b>	<b>4</b>
<b>4 Input/output pin assignment</b>	<b>5</b>
<b>5 Electrical Characteristics</b>	<b>6</b>
<b>6 Power On/Off Sequence</b>	<b>9</b>
<b>7 Mechanical Specification</b>	<b>10</b>
<b>8 Optical Characteristics</b>	<b>12</b>
<b>9 Handling, Safety, and Environment Requirements</b>	<b>13</b>
<b>10 Reliability test</b>	<b>14</b>
<b>11 Block Diagram</b>	<b>15</b>
<b>12 Packaging</b>	<b>16</b>
<b>13 Mark and Bar Code Definition</b>	<b>16</b>

# 1 General Description

SE0600N06-A0 is an Active Matrix Electrophoretic Display(AM EPD), High-Resolution AM TFT Black/White displaymodule which can be used in portable electronic devices, such as E-book Reader.

The module is a TFT-array driving electrophoretic display, with integrated circuits including source and gate drivers. The resolution of the module is 1024x758 (XGA), and the active area is 6 inch diagonal.

## 2 Features

- ◆ 1024x758 display
- ◆ White Reflectance above 35% (0 minute)
- ◆ Contrast Ratio above 8:1 (0 minute)
- ◆ 3:4 aspect ratio
- ◆ Wide viewing angle
- ◆ Ultra low power consumption
- ◆ Reflective mode
- ◆ Bi -stable display
- ◆ Commercial temperature range
- ◆ Landscape, portrait modes
- ◆ Antiglare display surface

## 3 Application

E-book reader.

## 4 Input/output pin assignment

No.	Pin Name	Description
1	VNEG	Negative power supply source driver
2	VGL	Negative power supply gate driver
3	VSS	Ground
4	NC	NO Connection
5	NC	NO Connection
6	VDD	Digital power supply drivers
7	VSS	Ground
8	CLK	Clock source driver
9	VSS	Ground
10	LE	Latch enable source driver
11	OE	Output enable source driver
12	SPH	Start pulse source driver
13	D0	Data signal source driver
14	D1	Data signal source driver
15	D2	Data signal source driver
16	D3	Data signal source driver
17	D4	Data signal source driver
18	D5	Data signal source driver
19	D6	Data signal source driver
20	D7	Data signal source driver
21	VCOM	Common connection
22	NC	NO Connection
23	NC	NO Connection
24	NC	NO Connection
25	NC	NO Connection
26	VSS	Ground
27	GMODE1	Output mode selection gate driver
28	CPV	Shift clock input
29	STV	Start pulse gate driver
30	NC	NO Connection
31	VBORDER	Border connection
32	VSS	Ground
33	VPOS	Positive power supply source driver
34	VGH	Positive power supply gate driver

## 5 Electrical Characteristics

### 5.1 Module interface description

This module can be driven by ASIC AVT6201A Timing Controller(T-Con).

### 5.2 Module DC characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Signal ground	VSS		-	0	-	V
Logic Voltage supply	VDD		3.0	3.3	3.6	V
	IVDD	VDD=3.3V	-	2.0	-	mA
Gate Positive supply	VGH		21	22	23	V
	IVGH	VGH=22V	-	0.6	-	mA
Gate Negative supply	VGL		-21	-20	-19	V
	IVGL	VGL=-20V	-	-3.0	-	mA
Source Positive supply	VPOS		14.6	15	15.4	V
	IPOS	VPOS=15V	-	30	-	mA
Source Negative supply	VNEG		-15.4	-15	-14.6	V
	INEG	VNEG=-15V	-	-30	-	mA
Asymmetry source	VASYM	VPOS+VNEG	-80	0	80	mV
Common voltage	VCOM		-2.5	Adjusted	-1.5	V
	ICOM		-	-2.0	-	mA
Standby power module	PSTBY			-	0.4	mW
Typical power module	PTYP		-	600	1200	mW
Operating temperature			0		50	°C
Operating relative humidity	RHop		0		70	%
Storage temperature			-20	-	70	°C
Storage relative humidity	RHst		30		60	%
Maximum image update time at 25°C				960	1200	ms

Notes:


1. The maximum power and maximum current are specified for the worst case power consumption.
2. The typical power is measured when "typical images" are displayed.
3. The standby power is the consumed power when the module controller is in standby mode.
4. The listed electrical/optical characteristics are only guaranteed under the controller & waveform provided by SID.

### 5.3 Module AC characteristics


Note: VDD=3.0V to 3.6V, unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	App Pin
Clock frequency	fcpv			200	kHz	CPV
Clock CPV high time	tCPVh	0.5	-	-	us	
Clock CPV low time	tCPVI	0.5	-	-	us	
Data setup time	tSU	100	-	-	ns	CPVSTV
Data hold time	tH	300	-	-	ns	Belowtable
Clock CLK cycle time	tclk	40	-	-	ns	
D0 .. D7, SPH setup time	tsu	8	-	-	ns	
D0 .. D7, SPH hold time	th	8	-	-	ns	
LE on delay time	tLEdly	40	-	-	ns	
LE high-level pulse width	tLEw	40	-	-	ns	
LE off delay time	tLEoff	40	-	-	ns	
SHR setup time	tMsu	100	-	-	ns	
SHR hold time	tMh	10	-	-	ns	

### Clock & Data Timing

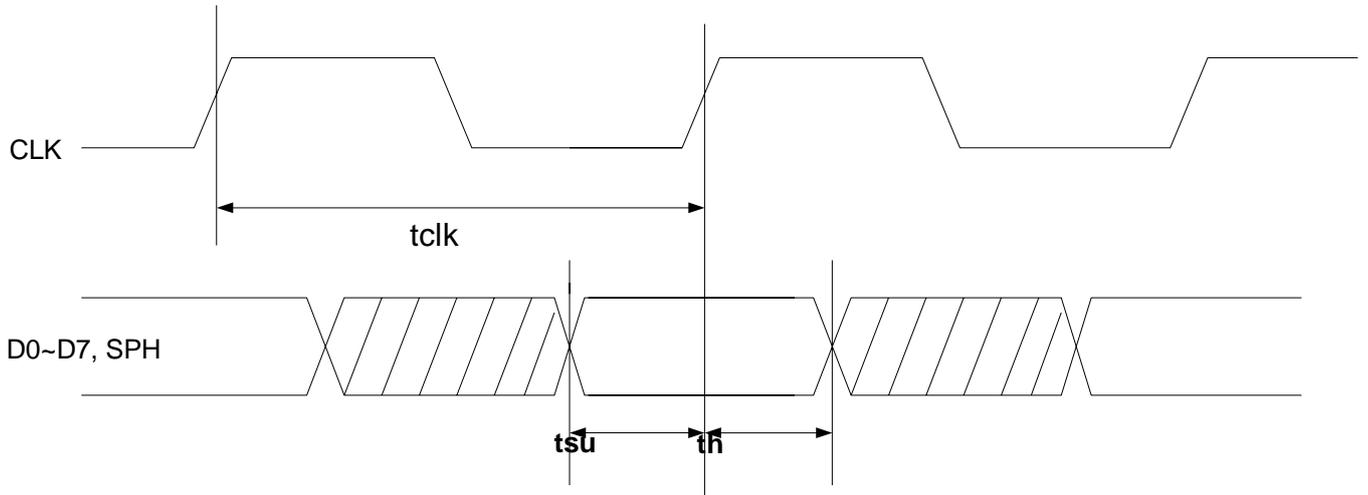

### Output Latch/Control Signals

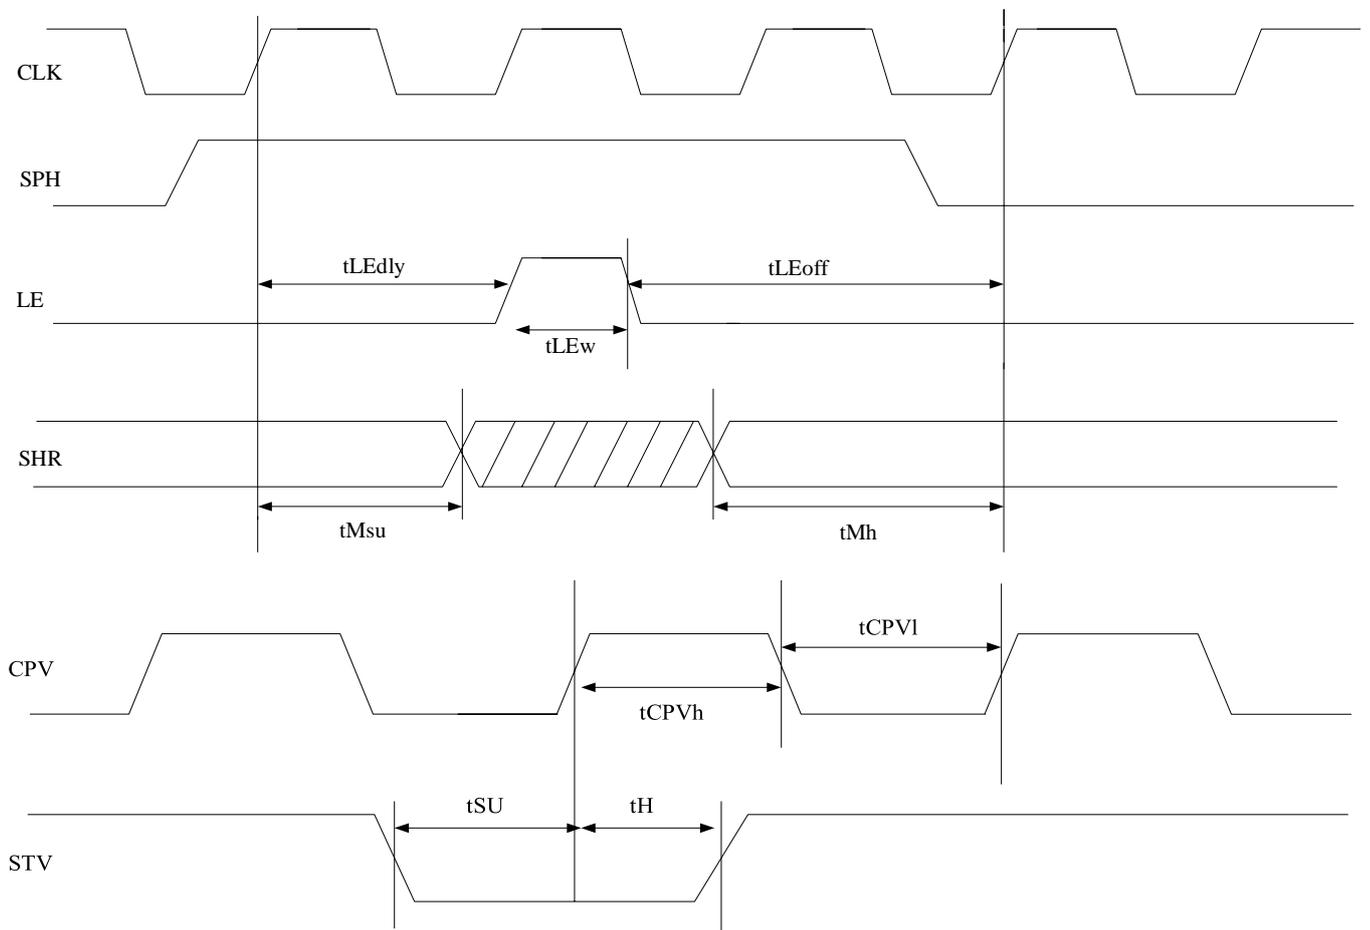


## 6 Power On/Off Sequence

To prevent the device from damage due to latch up, the power on/off sequence shown below must be followed.

When power on: VDD -> VGL -> VNEG/VGH/VPOS -> Vcom

When power off: Vcom -> VNEG/VGH/VPOS -> VGL -> VDD

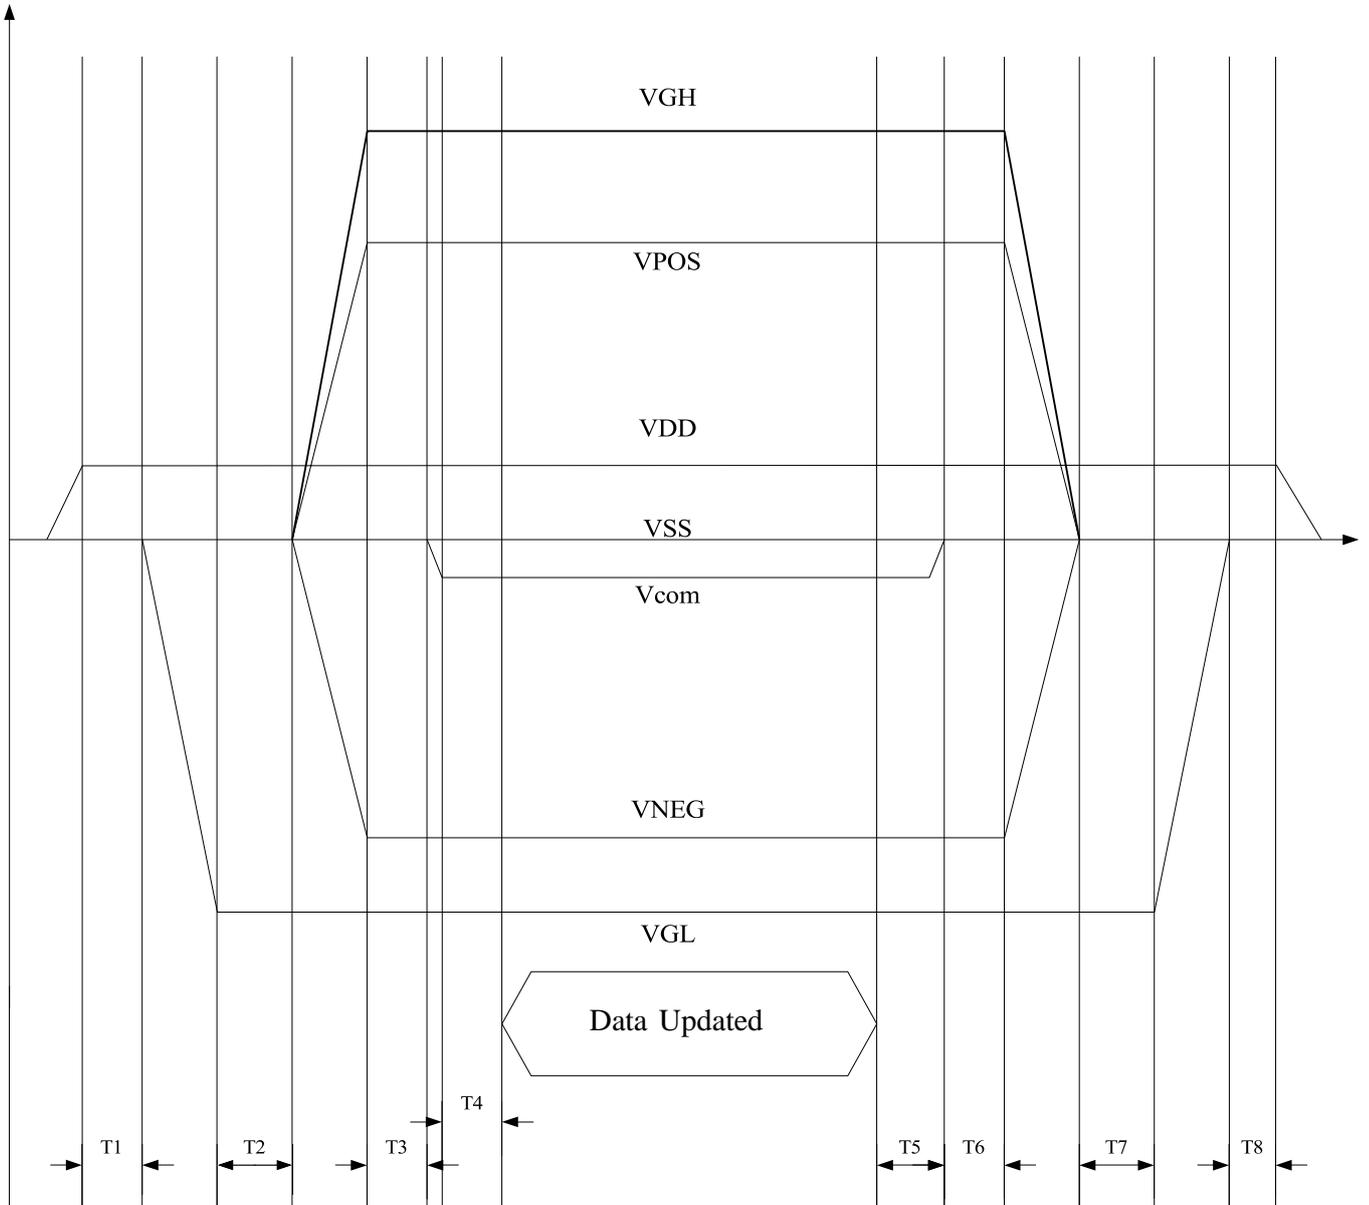

	Min	Max
T1	1ms	-
T2	1ms	-
T3	1ms	-
T4	1ms	20ms
T5	1ms	20ms
T6	0ms	-
T7	0ms	-
T8	1ms	-

## 7 Mechanical Specification

### 7.1 Dimension


PARAMETER	VALUE	UNIT	Remark
Display Resolution	1024×758	dots	
Active area dimensions			
Horizontal	90.581	mm	
Vertical	122.368	mm	
Screen size	6.0 ( 3:4 diagonal )	Inch	
Pixel pitch			
Horizontal	0.1195	mm	
Vertical	0.1195	mm	
Pixel configuration	Square		
Overall dimensions			
Width	101.8	mm	
Height	138.4	mm	
Thickness	1.34	mm	
Mass of the module	43.5	g	

### 7.2 Electrical Connector


SERVICE	CONNECTOR	TYPE NUMBER	NUMBER OF PINS	MATING CONNECTOR
Interface	PANASONIC	/	34	FPC pitch=0.5mm

### 7.3 Mechanical Drawing of EPD Module

序号	版本	更改内容	发行日期
1	RV1.0	新版发行	2021.07.14
2	RV1.1	修改FPC	2021.09.11

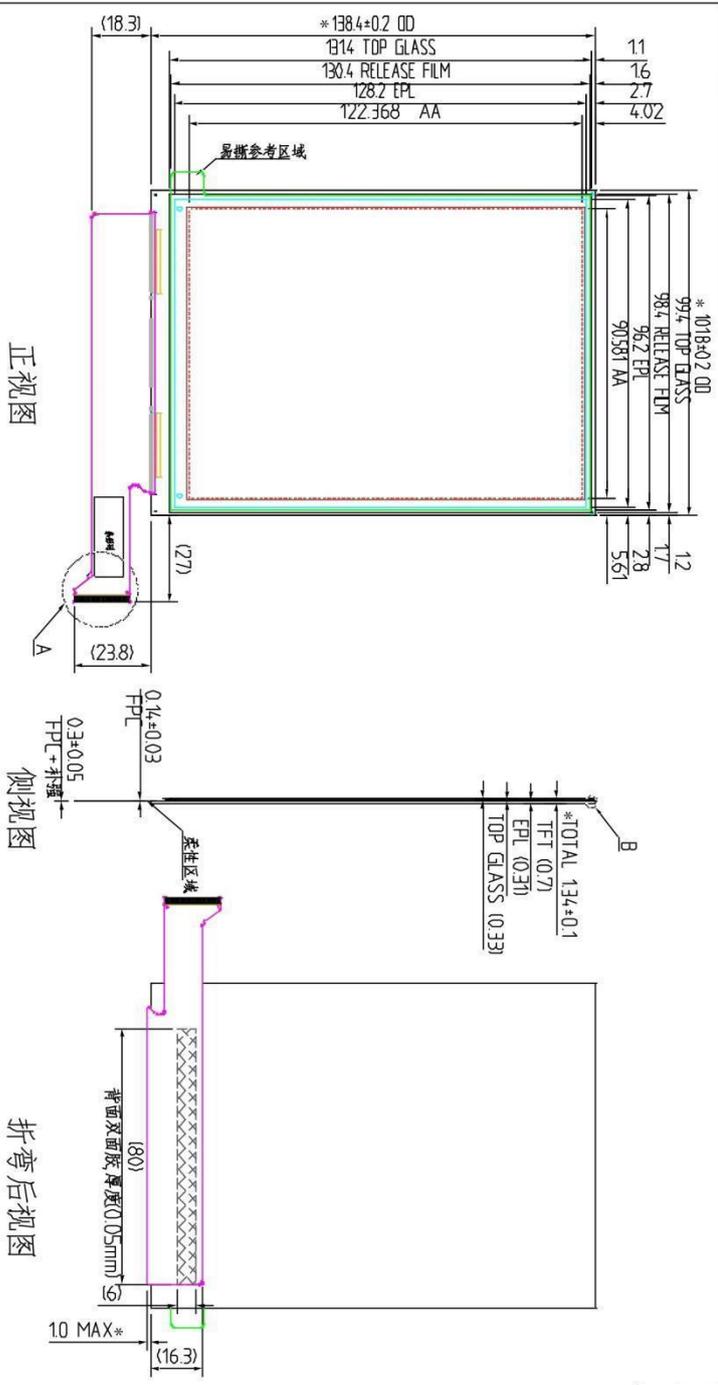

- NOTES :
- 1) Display mode 6.0" array for EPD;
  - 2) Unspecified Tolerance: ±0.20;
  - 3) Material conform to the RoHS standard;
  - 4) "Mark" \* "for control DIM," (" ) DIM does not need to be measured.
- 5) Product thickness (THK) include: TFT+EPL+PS.
- 产品厚度包括: TFT+EPL+PS.

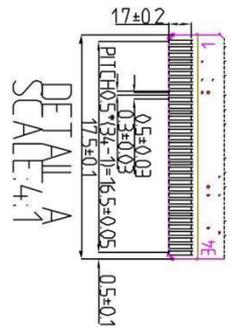

版本信息	RV1.1	Tolerance: Decimal ±.50 ±.20 ±.05 Min: ±0.5°	
设计		产品名称	显示模组总装图
审核		材料	
批准		视角	1/1
		比例	1/1
		部门名称	
		P/N	
		页码	1/1

## 8 Optical Characteristics

Parameter	Conditions	Values			Units	Notes
		Min.	Typ.	Max		
White Reflectivity	0 minute	35			%	
Contrast Ratio (CR)	0 minute	8:1	-	-		1
Image Update Time:	GC16(T=0°C)	-	1500	1600	ms	
	GC16(T=25°C)	-	960	1200		
	GC16(T≥35°C)	-	760	960		
	DU (T=0°C)	-	500	540		
	DU(T≥20°C)	-	300	360		

(T<sub>amb</sub>=25°C, f<sub>v</sub>=50Hz. Measurements are made with Eye-One Pro Spectrophotometer.)

### Notes:

1. CR=Surface Reflectance with all white pixel/Surface Reflectance with all black pixels;

## 9 Handling, Safety, and Environment Requirements

### Warning

The display glass may break when it is dropped or bumped on a hard surface. Handle with care. Should the display break, do not touch the electrophoretic material. In case of contact with electrophoretic material, wash with water and soap.


### Caution

The display module should not be exposed to harmful gases, such as acid and alkali gases, which corrode electronic components. Disassembling the display module can cause permanent damage and invalidates the warranty agreements. Observe general precautions that are common to handling delicate electronic components. The glass can break and frontsurfaces can easily be damaged. Moreover the display is sensitive to static electricality and other rough environmental conditions.

## 10 Reliability test

N o .	TEST	CONDITION	METHOD	REMARK
1	High-Temperature Operation	T = +50°C, RH = 30% for 168 hrs	IEC 60 068-2-2Bp	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
2	Low-Temperature Operation	T = 0°C for 168 hrs	IEC 60 068-2-2Ab	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
3	High-Temperature Storage	T = +70°C, RH=23% for 168 hrs	IEC 60 068-2-2Bp	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
4	Low-Temperature Storage	T = -25°C for 168 hrs	IEC 60 068-2-1Ab	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
5	High-Temperature, High-Humidity Operation	T = +40°C, RH = 90% for 168 hrs	IEC 60 068-2-3CA	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
6	High Temperature, High-Humidity Storage	T = +60°C, RH=80% for 168hrs	IEC 60 068-2-3CA	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
7	Thermal Shock	1 cycle:[-25°C30min]→[+70°C30 min] : 50 cycles	IEC 60 068-2-14	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
8	Package Vibration	1.04G, Frequency:10~500Hz Direction: X,Y,Z Duration: 1 hours in each direction	Full packed for shipment	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
9	Package Drop Impact	Drop from height of 122 cm on concrete surface. Drop sequence: 1 corner, 3edges, 6faces One drop for each	full packed for shipment	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
10	Electrostatic Effect (non-operating)	Machine model +/- 250V, 0Ω , 200pF	IEC 62179, IEC 62180	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
11	Stylus Tapping	POLYACETAL Pen:Top R0.8mm Load: 200gf;Speed:30times/min; Speed: 30times/min Total 13,500times,		At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.

## 11 Block Diagram

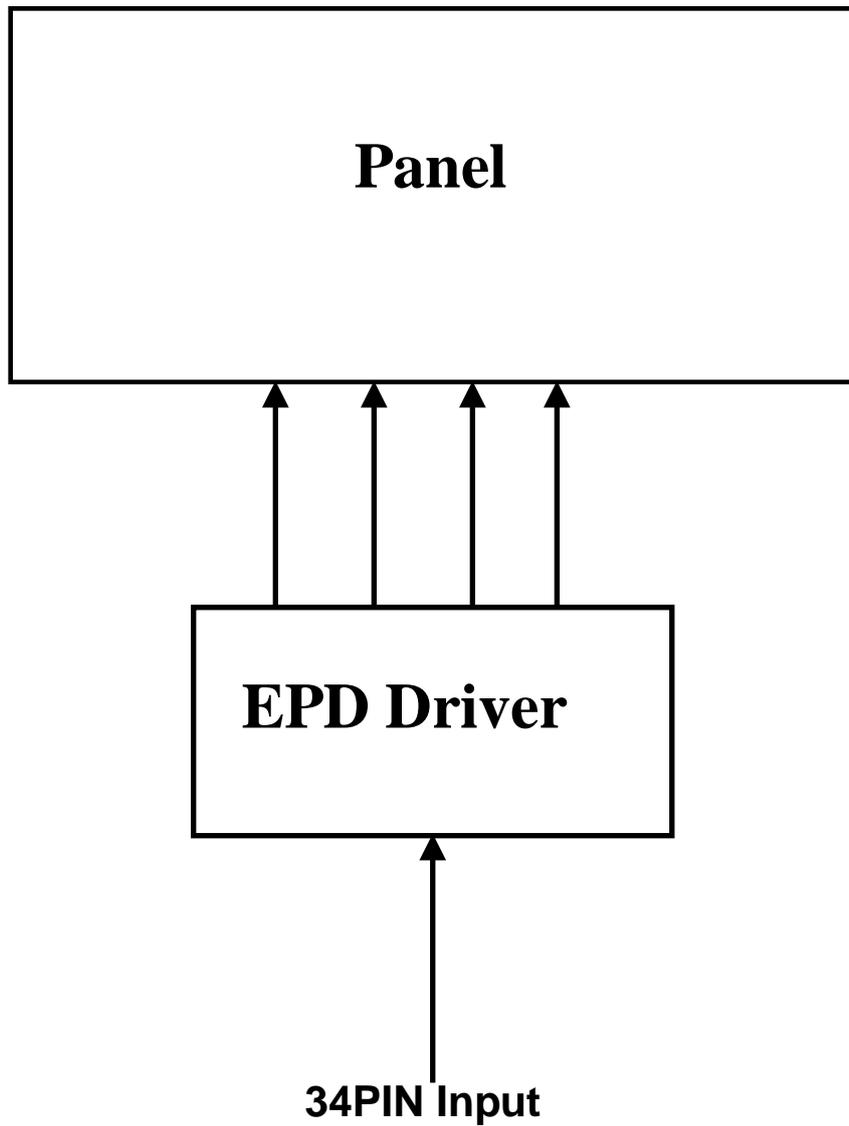

## **12 Packaging**

TBD

## **13 Mark and Bar Code Definition**

TBD