



## LCD MODULE SPECIFICATION

Customer: \_\_\_\_\_

Module No.: RC21I4BSC-A4

Date: 2025 -08-20

Version: 1.0

**For Customer's Acceptance:**

Approved by	Comment

Approved by	Checked by	Prepared by
Zaiping.Yang	Xianren.Zhou	Ruipan.Zhao



## Table of Contents

Record of Revision.....	3
1 General Specifications.....	4
2 Pin Assignment.....	5
3 Absolute Maximum Ratings .....	6
4. Electrical Characteristics .....	<a href="#">7</a>
5 Timing Chart.....	<a href="#">8</a>
6 Optical Characteristics .....	<a href="#">13</a>
7 Environmental / Reliability Test .....	<a href="#">16</a>
8 Mechanical Drawing.....	<a href="#">17</a>
9 Precautions for Use of LCD Modules .....	<a href="#">18</a>





## 1 General Specifications

No.	Item	Specification	Remark
1	LCD Size	2.1 inch (Diagonal)	
2	Driver Element	a-Si TFT active matrix	
3	Resolution	480(H)x (RGB) x480(V)	
4	Display Mode	Normally Black, Transmissive	
5	Pixel Pitch(mm)	0.037 (H) × 0.111 (V)	
6	Display Colors	16.7M	
7	Surface Treatment	--	
8	Color Arrangement	RGB-Stripe	
9	Interface	MIPI	
10	Viewing Direction	All	
11	Gray Scale Inversion Direction	/	Note 1
12	Outline Dimension (mm)	73.27 (W) × 73.27 (H) × 3.83 (T)	
13	Active Area (mm)	53.28(W) × 53.28 (H)	
14	Touch Screen	With CTP	
15	Display Driver IC	ST7701S	
16	Touch Driver IC	CT1151QM	

Note 1: Viewing direction for best image quality is different from TFT definition. There is a 180° shift.

Note 2: RoHS compliant.



## 2 Pin Assignment

### 2.1 LCD Pin assignment

Match connector: XF2M-3015-1A (OMRON) or equivalent.

PIN	Symbol	I/O	Description	Remark
1	LEDA	P	Power supply for LED+	
2	LEDK1	P	Power supply for LED-	
3	LEDK2	P	Power supply for LED-	
4	VCI	P	Power supply for the system (3.3V)	
5	IOVCC	P	Power supply for I/O port(1.8V)	
6	RESET	I	Chip reset signal	
7	TE	O	Output a frame head pulse signal	
8	PWM	I/O	The PWM frequency output for LCD driver control.	
9	GND	P	Ground	
10	D0P	I	MIPI datal input pins. (Data lane 0)	
11	D0N	I	MIPI datal input pins. (Data lane 0)	
12	GND	P	Ground	
13	D1P	I	MIPI datal input pins. (Data lane 1)	
14	D1N	I	MIPI datal input pins. (Data lane 1)	
15	GND	P	Ground	
16	CLKP	I	MIPI clock differential signal input pins.	
17	CLKN	I	MIPI clock differential signal input pins.	
18	GND	P	Ground	
19	NC	-	Dummy	
20	NC	-	Dummy	
21	GND	P	Ground	
22	NC	-	Dummy	
23	NC	-	Dummy	
24	GND	P	Ground	
25	TP_INT	I/O	External interrupt to the host 3.3V	
26	TP_SDA	I/O	I2C data input and output 3.3V	
27	TP_SCL	I/O	I2C clock input 3.3V	
28	TP_RESET	I	External Reset, Low is active 3.3V	
29	TP_VCI	I	Analog power supply 3.3V	
30	TP_IOVCC	-	No connection.	

I---Input, O---Output, P--- Power/Ground



### 3 Absolute Maximum Ratings

Ta = 25°C

Item	Symbol	Min.	Max.	Unit	Remark
Power Voltage	VCI	-0.30	+4.2	V	
Operating Temperature	Top	-20.0	70.0	°C	
Storage Temperature	T <sub>st</sub>	-30.0	80.0	°C	
Operating and Storage Humidity	H <sub>stg</sub>	10%	90%	%(RH)	

### 4. Electrical Characteristics

#### 4.1 Recommended Operating Condition

VCI=3.3V, GND=0V, Ta = 25°C

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply Voltage	VCI	2.8	3.0	3.3	V	
TP Power	VDD	2.8	3.0	3.3	V	
Input Signal Voltage	Low Level V <sub>IL</sub>	0	-	0.3 x VCI	V	
	High Level V <sub>IH</sub>	0.7 x VCI	-	VCI	V	
Current of analog supply voltage	I <sub>VCI</sub>	-	60	-	mA	VCI=3.3V, color bar pattern

### 4.2 Backlight Unit Driving Condition

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Forward Current	$I_F$	-	40	50	mA	4 LEDs (2 LED Serial, 2 LED Parallel)
Forward Current Voltage	$V_F$	-	12	13.2	V	
Backlight Power Consumption	$W_{BL}$	-	480	660	mW	
Operating Life Time	--	30000	--	--	hrs	Note 2, Note 3


Note1: The LED driving condition is defined for each module (2 LED Serial, 2 LED Parallel).

Note2: When LCM is operated, the stable forward current should be inputted. And forward voltage is for reference only.

Note3: Optical performance should be evaluated at  $T_a=25^\circ\text{C}$  When LED is driven at high current, high ambient temperature & humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

Note4: The LED driving condition is defined for each LED module.

### LED CIRCUIT DIAGRAM:

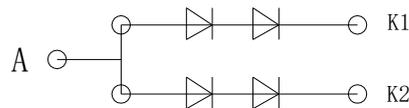


$I_{DD}=40\text{mA}$ ,  $V_{DD}=12.0\text{V}$  TYP

2S\*2P=4LED (Double core LED)


## 5 Timing Chart

### 5.1 DSI Interface Timing Characteristics

High Speed Mode

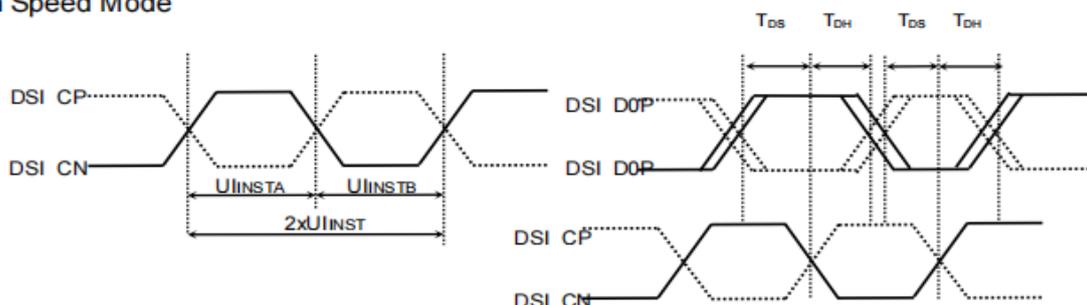

**Figure 7-4: DSI clock timing Characteristics**

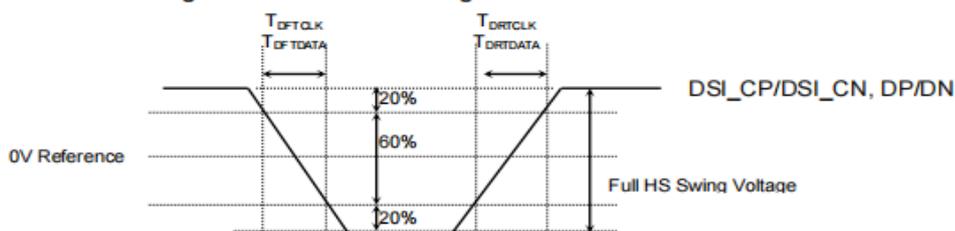


**Rising and falling time on clock and data channel**


(VSSA=0V, IOVCC=1.65V to 3.3V, VCI=2.5V to 3.3V, TA = -30 to 70°C)

Signal	Item	Symbol	Spec.			Unit
			Min.	Typ.	Max.	
DSI_CP/ DSI_CN	Double UI instantaneous	2xUIINST	4LANE: 3.30 3LANE: 2.85 @ VDDD=1.8V	-	25	ns
	UI instantaneous	UIINSTA UIINSTB	4LANE: 1.67 3LANE: 1.43 @ VDDD=1.8V	-	12.5	ns
DP/DN	Data to clock setup time	T <sub>DS</sub>	0.15xUI	-	-	ps
	Data to clock hold time	T <sub>DH</sub>	0.15xUI	-	-	ps
DSI_CP/ DSI_CN	Differential rise time for clock	T <sub>DRTCLK</sub>	150	-	0.3UI	ps
	Differential fall time for clock	T <sub>DFTCLK</sub>	150	-	0.3UI	ps
DP/DN	Differential rise time for data	T <sub>DRTDATA</sub>	150	-	0.3UI	ps
	Differential fall time for data	T <sub>DFTDATA</sub>	150	-	0.3UI	ps

### Low Power Mode

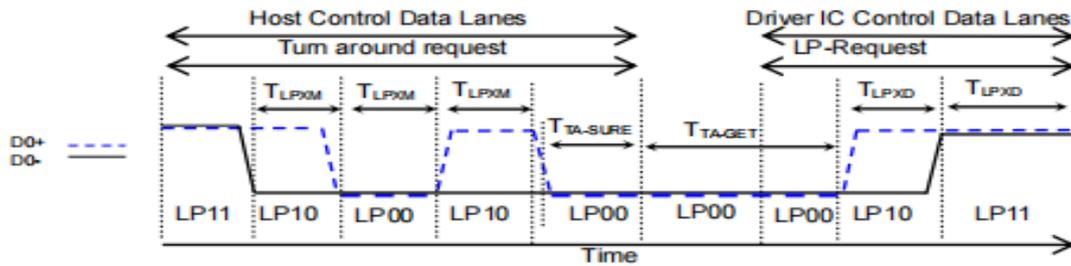

**BTA from HOST to Display Module Timing**

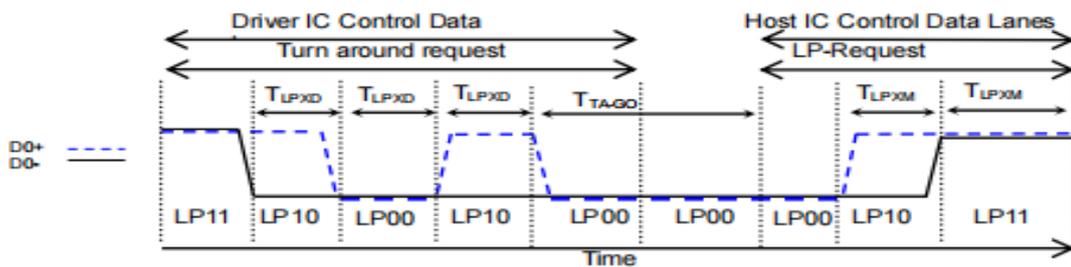

**BTA from Display Module Timing to HOST**

(VSSA=0V, IOVCC=1.65V to 3.3V, VCI=2.3V to 3.3V, T<sub>A</sub> = -30 to 70°C)

Signal	Item	Symbol	Spec.			Unit
			Min.	Typ.	Max.	
DSI_D0P/ DSI_D0P	Length of LP-00/LP01/LP10/LP11 Host → Display module	T <sub>LPXM</sub>	50	-	-	ns
	Length of LP-00/LP01/LP10/LP11 Display module → Host	T <sub>LPXD</sub>	50	-	-	ns
	Time-out before the MPU start driver	T <sub>TA-SURE</sub>	T <sub>LPXD</sub>	-	2xT <sub>LPXD</sub>	ns
	Time to drive LP-00 by display module	T <sub>TARGET</sub>	5xT <sub>LPXD</sub>	-	-	ns
	Time to drive LP-00 after turnaround request Host	T <sub>TAGO</sub>	4xT <sub>LPXD</sub>	-	-	ns

**DSI Low Power Mode Characteristics**

## 5.2 Recommended Timing Setting of TCON


TCON (Embedded in Source IC) Input Timing (DCLK, HS, VS, DE)

VCI=3.3V, GND=0V, Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK	Fclk	10	17	30	MHz	
	tclk	33	58.8	100	ns	
HSD	hdisp	480	480	480	tclk	
	hpw	2	25	255	tclk	
	hbp	2	30	255	tclk	
	hfp	2	4	--	tclk	
VSD	vdisp	480	480	480	th	
	vs	2	8	254	th	
	vbp	2	20	254	th	
	vfp	2	15	--	th	


Note: For reference only, it needs to be adjusted according to the actual display effect.

## 5.3 Reset input timing

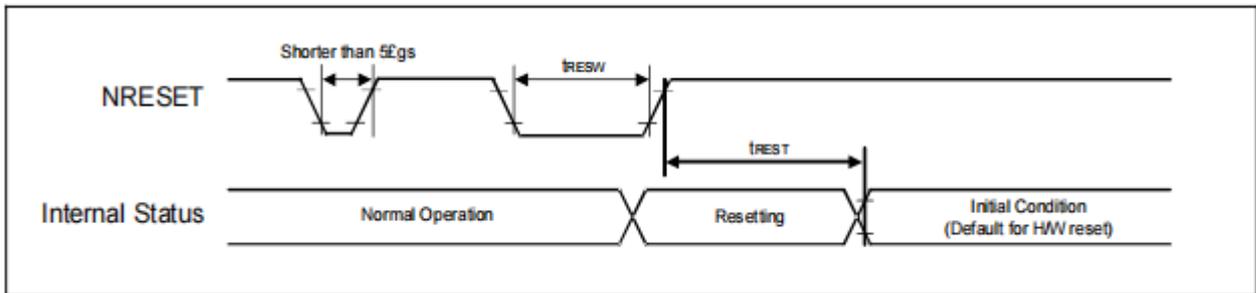

Symbol	Parameter	Related Pins	Spec.			Note	Unit
			Min.	Typ.	Max.		
tRESW	Reset low pulse width <sup>(1)</sup>	NRESET	10	-	-	-	μs
tREST	Reset complete time <sup>(2)</sup>	-	15	-	-	When reset applied during SLPIN mode	ms
		-	120	-	-	When reset applied during SLPOUT mode	ms


## 5.4 Power On Timing

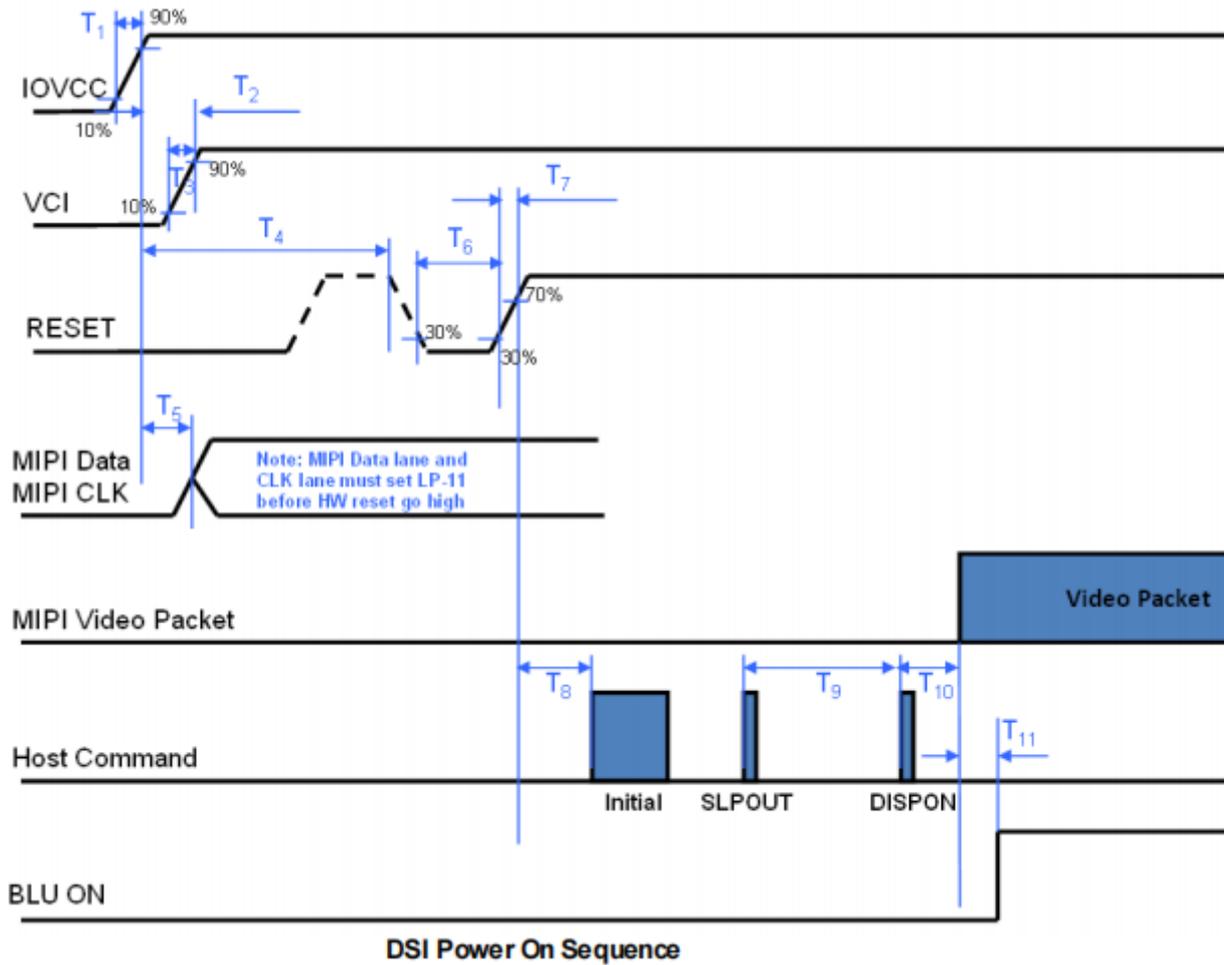

	Min.	Typ.	Max.	Unit
T1	0.01	-	10	ms
T2	No Limit			ms
T3	0.01	-	10	ms
T4	1	-	-	ms
T5	1	-	-	ms
T6	10	-	-	us
T7	No Limit			ns
T8	15	-	-	ms
T9	120	-	-	ms
T10	No Limit			ms
T11	100	150	-	ms

DSI Power On Timing

### 5.5 Power Off Timing

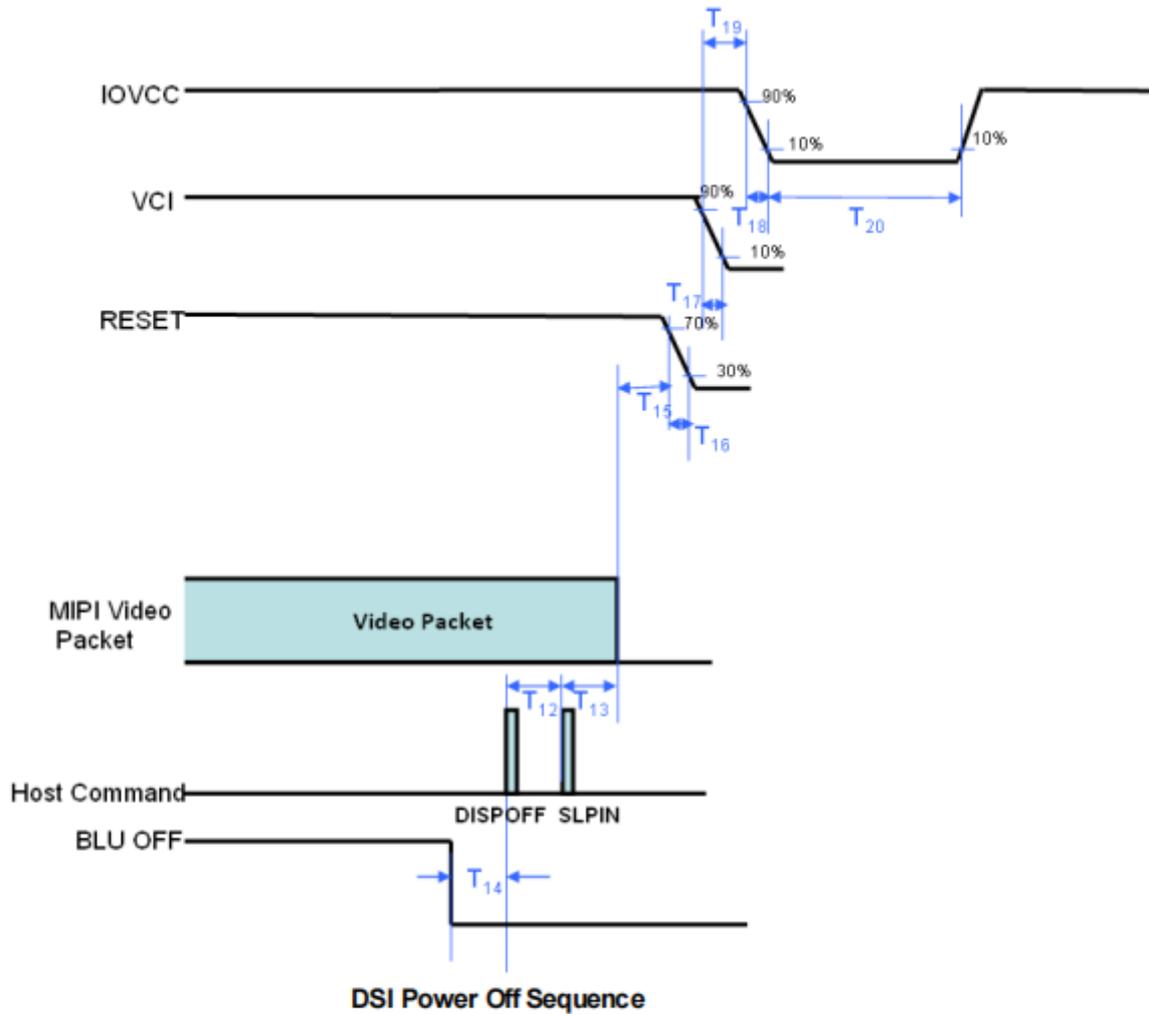

	Min.	Typ.	Max.	Unit
T12	2	-	-	Frame
T13	2	-	-	Frame
T14	40	100	-	ms
T15	10	-	-	ms
T16	No Limit			ms
T17	No Limit			ms
T18	No Limit			ms
T19	No Limit			ms
T20	100			ms

DSI Power Off Timing

## 6 Optical Characteristics

Ta=25°C


Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
View Angles	θT	CR ≥ 10	80	85	-	Degree	Note 2
	θB		80	85	-		
	θL		80	85	-		
	θR		80	85	-		
Contrast Ratio	CR	θ=0°	800	1000	-		Note1 Note3
Response Time	T <sub>ON</sub>	25°C	--	30	35	ms	Note1 Note4
	T <sub>OFF</sub>						
Chromaticity	White	Backlight is on	x	0.2659	0.2959	0.3259	Note1 Note5
			y	0.2570	0.2870	0.3170	
	Red		x	0.6330	0.6630	0.6930	
			y	0.2802	0.3102	0.3402	
	Green		x	0.3298	0.3598	0.3898	
			y	0.5467	0.5767	0.6067	
	Blue		x	0.0896	0.1196	0.1496	
			y	0.0278	0.0578	0.0878	
Uniformity	U		75	80	-	%	Note1 Note6
NTSC			65	70	-	%	Note 5
Luminance	L		-	500	-	cd/m <sup>2</sup>	Note1 Note7

Test Conditions:

1. I<sub>F</sub>= 40 mA, V<sub>F</sub>=12V and the ambient temperature is 25±2°C. humidity is 65±7%
2. The test systems refer to Note 1 and Note 2.

**Note 1: Definition of optical measurement system.**


Properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

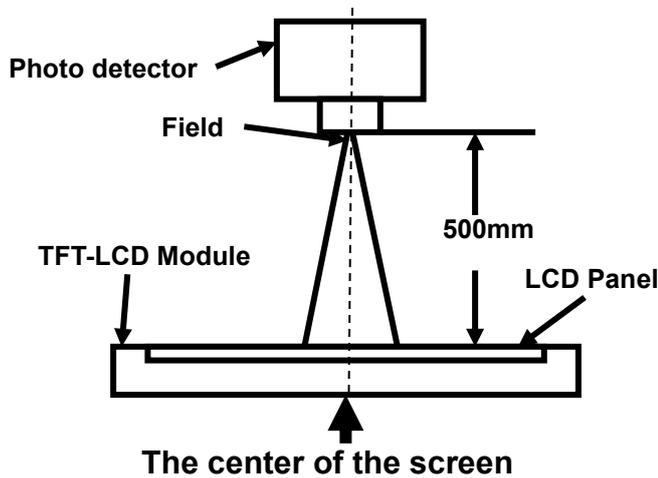

Item	Photo detector	Field
Contrast Ratio	BM-7A or similar equipment	1°
Luminance		
Chromaticity		
Lum Uniformity		
Response Time	BM-7A	2°

**Note 2: Definition of viewing angle range and measurement system.**

Viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

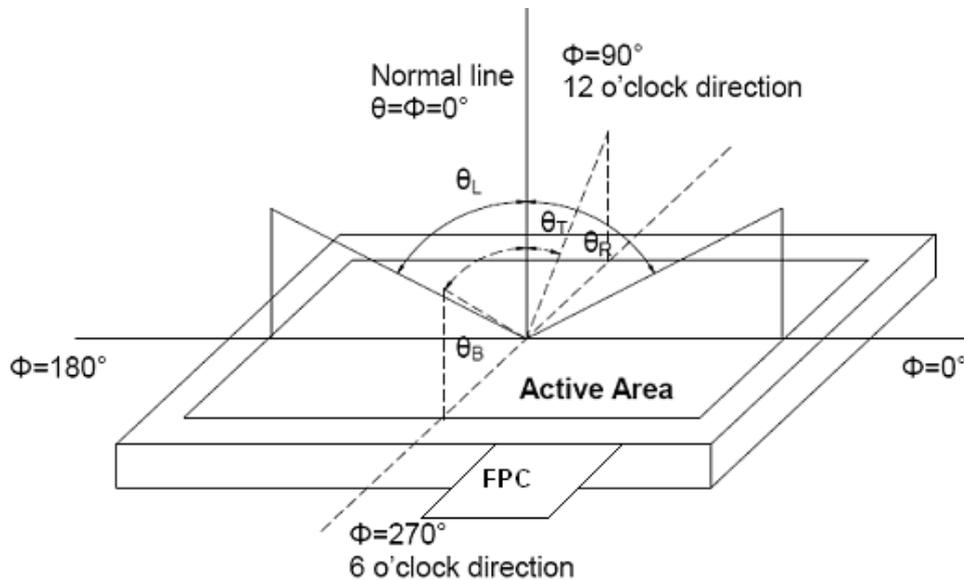

**Note 3: Definition of contrast ratio**

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$


“White state “: The state is that the LCD should drive by  $V_{white}$ .

“Black state”: The state is that the LCD should drive by  $V_{black}$ .

$V_{white}$ : To be determined     $V_{black}$ : To be determined.

**Note 4: Definition of response time**

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time ( $T_{ON}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{OFF}$ ) is the time between photo detector output intensity changed from 10% to 90%.

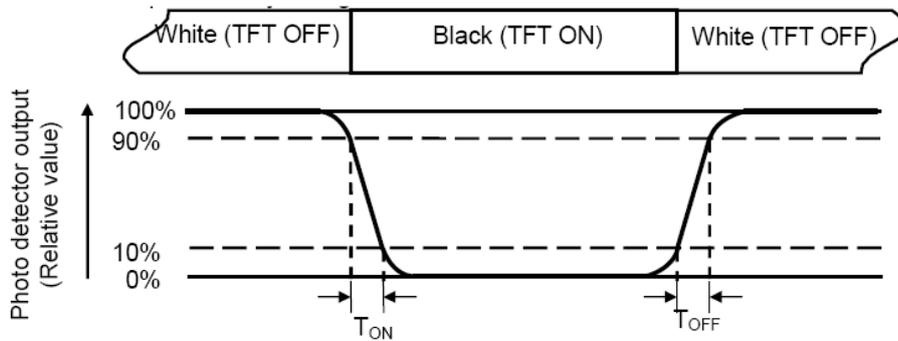

**Note 5: Definition of color chromaticity (CIE1931)**


Color coordinates measured at center point of LCD.

**Note 6: Definition of luminance uniformity**

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (U)} = L_{\min} / L_{\max}$$

L-----Active area length W----- Active area width

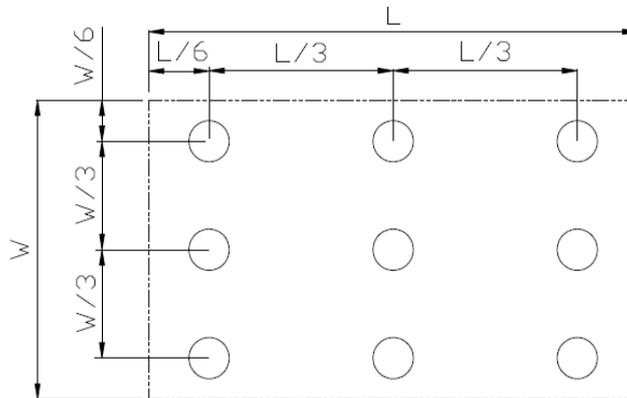

$L_{\max}$ : The measured Maximum luminance of all measurement position.

$L_{\min}$ : The measured Minimum luminance of all measurement position.

**Note 7: Definition of luminance:**

Measure the luminance of white state at center point.

## 6 Environmental / Reliability Test

No	Test Item	Condition	Remarks
1	High Temperature Operation	Ts = +70°C, 240 hours	No abnormalities in functions
2	Low Temperature Operation	Ta = -20°C, 240 hours	No abnormalities in functions
3	High Temperature Storage	Ta = +80°C, 240 hours	No abnormalities in functions
4	Low Temperature Storage	Ta = -30°C, 240 hours	No abnormalities in functions
5	Storage at High Temperature and Humidity	Ta = +60°C, 90% RH max,240hours	No abnormalities in functions
6	Thermal Shock (non-operating)	-30°C 30 min~ +70°C 30 min, Change time: 0.5 hour ← 5 min → 0.5 hour.10 Cycle	Start with cold temperature, End with high temperature,
7	ESD	C=150pF, R=330Ω,5point/panel Air: ±8Kv, 5times; Contact:±4Kv,5times (Environment:15°C~35°C, 30%~60%.86Kpa~106Kpa)	No abnormalities in functions

Note1: Ts is the temperature of panel's surface.

Note2: Ta is the ambient temperature of samples.

1	2	5	6																																																																																																																								
	由 Autodesk 教育版产品制作	原 本 (VER) 符 号 (SYMBOL) 变 更 记 录 (AMENDMENT) V0 V1	接 收 (SIGN) 日 期 (DATE) YYY 2025.09.04 YYY 2025.10.22																																																																																																																								
由 Autodesk 教育版产品制作																																																																																																																											
A	正视图 	侧视图 	背视图 																																																																																																																								
由 Autodesk 教育版产品制作																																																																																																																											
D	注：整机ESD接触8KV, 空气15KV; 盐雾试验: RH6.5-7.2 temperature 35' 48hour 笔硬度要求7H;		D																																																																																																																								
由 Autodesk 教育版产品制作																																																																																																																											
由 Autodesk 教育版产品制作		产 品 特 性 表 <table border="1" style="width:100%; border-collapse: collapse;"> <tr><td>1</td><td>LEDA</td></tr> <tr><td>2</td><td>LEDK1</td></tr> <tr><td>3</td><td>LEDK2</td></tr> <tr><td>4</td><td>VCI</td></tr> <tr><td>5</td><td>LOWC</td></tr> <tr><td>6</td><td>RESSET</td></tr> <tr><td>7</td><td>TE</td></tr> <tr><td>8</td><td>PWM</td></tr> <tr><td>9</td><td>GND</td></tr> <tr><td>10</td><td>DOP</td></tr> <tr><td>11</td><td>DON</td></tr> <tr><td>12</td><td>GND</td></tr> <tr><td>13</td><td>DIP</td></tr> <tr><td>14</td><td>DIN</td></tr> <tr><td>15</td><td>GND</td></tr> <tr><td>16</td><td>CLKP</td></tr> <tr><td>17</td><td>CLKN</td></tr> <tr><td>18</td><td>GND</td></tr> <tr><td>19</td><td>NC</td></tr> <tr><td>20</td><td>NC</td></tr> <tr><td>21</td><td>GND</td></tr> <tr><td>22</td><td>NC</td></tr> <tr><td>23</td><td>NC</td></tr> <tr><td>24</td><td>GND</td></tr> <tr><td>26</td><td>TP-INT</td></tr> <tr><td>28</td><td>TP-SDA</td></tr> <tr><td>27</td><td>TP-SCL</td></tr> <tr><td>28</td><td>TP-RESET</td></tr> <tr><td>29</td><td>TP-VCI</td></tr> <tr><td>30</td><td>TP-LOWC</td></tr> </table>	1	LEDA	2	LEDK1	3	LEDK2	4	VCI	5	LOWC	6	RESSET	7	TE	8	PWM	9	GND	10	DOP	11	DON	12	GND	13	DIP	14	DIN	15	GND	16	CLKP	17	CLKN	18	GND	19	NC	20	NC	21	GND	22	NC	23	NC	24	GND	26	TP-INT	28	TP-SDA	27	TP-SCL	28	TP-RESET	29	TP-VCI	30	TP-LOWC	产 品 特 性 表 <table border="1" style="width:100%; border-collapse: collapse;"> <tr><td>1</td><td>LEDA</td></tr> <tr><td>2</td><td>LEDK1</td></tr> <tr><td>3</td><td>LEDK2</td></tr> <tr><td>4</td><td>VCI</td></tr> <tr><td>5</td><td>LOWC</td></tr> <tr><td>6</td><td>RESSET</td></tr> <tr><td>7</td><td>TE</td></tr> <tr><td>8</td><td>PWM</td></tr> <tr><td>9</td><td>GND</td></tr> <tr><td>10</td><td>DOP</td></tr> <tr><td>11</td><td>DON</td></tr> <tr><td>12</td><td>GND</td></tr> <tr><td>13</td><td>DIP</td></tr> <tr><td>14</td><td>DIN</td></tr> <tr><td>15</td><td>GND</td></tr> <tr><td>16</td><td>CLKP</td></tr> <tr><td>17</td><td>CLKN</td></tr> <tr><td>18</td><td>GND</td></tr> <tr><td>19</td><td>NC</td></tr> <tr><td>20</td><td>NC</td></tr> <tr><td>21</td><td>GND</td></tr> <tr><td>22</td><td>NC</td></tr> <tr><td>23</td><td>NC</td></tr> <tr><td>24</td><td>GND</td></tr> <tr><td>26</td><td>TP-INT</td></tr> <tr><td>28</td><td>TP-SDA</td></tr> <tr><td>27</td><td>TP-SCL</td></tr> <tr><td>28</td><td>TP-RESET</td></tr> <tr><td>29</td><td>TP-VCI</td></tr> <tr><td>30</td><td>TP-LOWC</td></tr> </table>	1	LEDA	2	LEDK1	3	LEDK2	4	VCI	5	LOWC	6	RESSET	7	TE	8	PWM	9	GND	10	DOP	11	DON	12	GND	13	DIP	14	DIN	15	GND	16	CLKP	17	CLKN	18	GND	19	NC	20	NC	21	GND	22	NC	23	NC	24	GND	26	TP-INT	28	TP-SDA	27	TP-SCL	28	TP-RESET	29	TP-VCI	30	TP-LOWC
1	LEDA																																																																																																																										
2	LEDK1																																																																																																																										
3	LEDK2																																																																																																																										
4	VCI																																																																																																																										
5	LOWC																																																																																																																										
6	RESSET																																																																																																																										
7	TE																																																																																																																										
8	PWM																																																																																																																										
9	GND																																																																																																																										
10	DOP																																																																																																																										
11	DON																																																																																																																										
12	GND																																																																																																																										
13	DIP																																																																																																																										
14	DIN																																																																																																																										
15	GND																																																																																																																										
16	CLKP																																																																																																																										
17	CLKN																																																																																																																										
18	GND																																																																																																																										
19	NC																																																																																																																										
20	NC																																																																																																																										
21	GND																																																																																																																										
22	NC																																																																																																																										
23	NC																																																																																																																										
24	GND																																																																																																																										
26	TP-INT																																																																																																																										
28	TP-SDA																																																																																																																										
27	TP-SCL																																																																																																																										
28	TP-RESET																																																																																																																										
29	TP-VCI																																																																																																																										
30	TP-LOWC																																																																																																																										
1	LEDA																																																																																																																										
2	LEDK1																																																																																																																										
3	LEDK2																																																																																																																										
4	VCI																																																																																																																										
5	LOWC																																																																																																																										
6	RESSET																																																																																																																										
7	TE																																																																																																																										
8	PWM																																																																																																																										
9	GND																																																																																																																										
10	DOP																																																																																																																										
11	DON																																																																																																																										
12	GND																																																																																																																										
13	DIP																																																																																																																										
14	DIN																																																																																																																										
15	GND																																																																																																																										
16	CLKP																																																																																																																										
17	CLKN																																																																																																																										
18	GND																																																																																																																										
19	NC																																																																																																																										
20	NC																																																																																																																										
21	GND																																																																																																																										
22	NC																																																																																																																										
23	NC																																																																																																																										
24	GND																																																																																																																										
26	TP-INT																																																																																																																										
28	TP-SDA																																																																																																																										
27	TP-SCL																																																																																																																										
28	TP-RESET																																																																																																																										
29	TP-VCI																																																																																																																										
30	TP-LOWC																																																																																																																										
由 Autodesk 教育版产品制作																																																																																																																											
由 Autodesk 教育版产品制作		总 成 图 	总 成 图 由 Autodesk 教育版产品制作																																																																																																																								
由 Autodesk 教育版产品制作																																																																																																																											
由 Autodesk 教育版产品制作		1. GENERAL TOLERANCES: ±0.2 2. DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN MILLIMETERS 3. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY 4. DIMENSIONS IN SQUARE BRACKETS ARE FOR REFERENCE ONLY 5. DIMENSIONS IN CIRCLES ARE FOR REFERENCE ONLY 6. DIMENSIONS IN DIAMETERS ARE FOR REFERENCE ONLY 7. DIMENSIONS IN SQUARE BRACKETS ARE FOR REFERENCE ONLY 8. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY 9. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY 10. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY 11. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY	1. 公差等级: ±0.2 2. 尺寸公差: 除非另有说明, 均以毫米为单位 3. 尺寸公差在括号内者仅供参考 4. 尺寸公差在方括号内者仅供参考 5. 尺寸公差在圆圈内者仅供参考 6. 尺寸公差在直径符号内者仅供参考 7. 尺寸公差在方括号内者仅供参考 8. 尺寸公差在圆圈内者仅供参考 9. 尺寸公差在圆圈内者仅供参考 10. 尺寸公差在圆圈内者仅供参考 11. 尺寸公差在圆圈内者仅供参考																																																																																																																								
由 Autodesk 教育版产品制作																																																																																																																											
由 Autodesk 教育版产品制作		1. GND 2. TP-INT 3. TP-SDA 4. TP-SCL 5. TP-LOWC 6. TP-RESET 7. TP-VCI	1. GND 2. TP-INT 3. TP-SDA 4. TP-SCL 5. TP-LOWC 6. TP-RESET 7. TP-VCI																																																																																																																								
由 Autodesk 教育版产品制作																																																																																																																											
由 Autodesk 教育版产品制作		1. GND 2. TP-INT 3. TP-SDA 4. TP-SCL 5. TP-LOWC 6. TP-RESET 7. TP-VCI	1. GND 2. TP-INT 3. TP-SDA 4. TP-SCL 5. TP-LOWC 6. TP-RESET 7. TP-VCI																																																																																																																								
由 Autodesk 教育版产品制作																																																																																																																											



## 9 Precautions for Use of LCD Modules

### Handling Precautions

9.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

9.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

9.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

9.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

9.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

9.1.6 Do not attempt to disassemble the LCD Module.

9.1.7 If the logic circuit power is off, do not apply the input signals.

9.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

9.1.8.1 Be sure to ground the body when handling the LCD Modules.

9.1.8.2 Tools required for assembly, such as soldering irons, must be properly ground.

9.1.8.3 To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

9.1.8.4 The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

### Storage Precautions

9.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

9.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is: Temperature : 0°C ~ 40°C      Relatively humidity: ≤80%

9.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

### Transportation Precautions

9.3.1 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.